


**Technical Specs:**

Insulator: Black glass filled polyester PPS-GF30-FR  
 Flammability: UL 94V-O  
 Sleeve: Brass CuZn36Pb3 (C36000)  
 Contact clip (4 finger): Beryllium copper (C17200)  
 Mating pins: Outside Diameter 0.43 to 0.56 mm  
 Forces: (polished steel gauge 0.51 mm)  
 Insertion: 2 N typ.  
 Withdrawal: 1 N typ.  
 Mechanical life: min 500 cycles  
 Rated current: 3 A  
 Contact resistance: max 20 Milliohms  
 Dielectric strength: min 1000 V RMS

**HOW TO ORDER:**

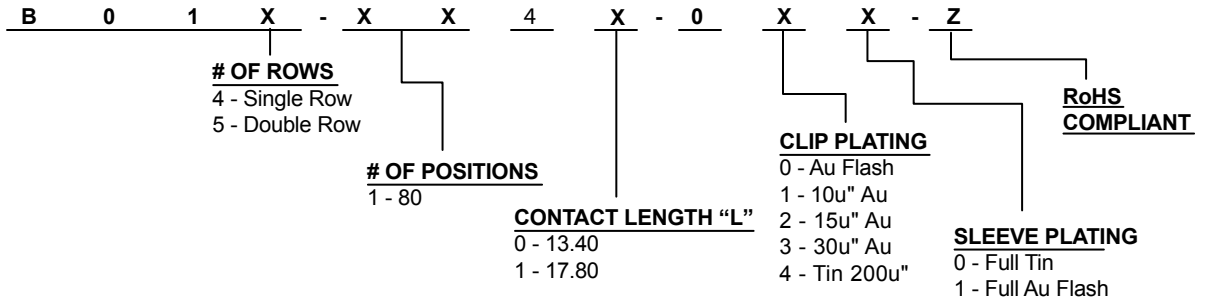

Rev	Drawn	Checked	Approved	Date	
0	B.S.	S.M.	S.M.	07/25/11	<b>SMP TECHNOLOGY, INC.</b>
TOL. DEC. .X +/- 0.30 .XX +/- 0.25 .XXX +/- 0.20 ANGLE +/- 3° UNIT: mm					SERIES: B01X-XX4X-0XX-Z
					Pg: 1