

DIMENSION(mm)


CONTACTS	A	B	C	D	E
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	22.76
44	23.28	23.28	12.70	12.70	28.05
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.83
84	35.98	35.98	25.40	25.40	46.00

ELECTRICAL:

CURRENT: 1A
 CONTACT RESISTANCE: < 30m Ω
 INSULATOR RESISTANCE: > 1000M Ω
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL:

CONTACT: PHOSPHOR BRONZE
 INSULATOR: POLYPHENYLENE SULFIDE (P.P.S.)



HOW TO ORDER:

B 0 2 4 - 3 2 2 X - 1 0 X - Z

NUMBER OF CONTACTS:

20 thru 84

PLASTIC STYLE:

2 - RECTANGLE

PACKAGING:

1 - TAPE & REEL
 2 - TUBE

LOCATOR:

0 - W/OUT LOCATOR
 1 - W/ LOCATOR

PLATING OVERALL:

0 - FULL TIN
 1 - FULL Au FLASH
 3 - 10u" Au
 4 - 15u" Au
 5 - 30u" Au

ROHS COMPLIANT

SELECTIVE PLATING:

6 - Au FLASH CONTACT AREA/TIN TAIL
 7 - 10u" Au CONTACT AREA/TIN TAIL
 8 - 15u" Au CONTACT AREA/TIN TAIL
 9 - 30u" Au CONTACT AREA/TIN TAIL

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	02/26/08


SMP TECHNOLOGY, INC.

SCALE: N/A

PLCC Socket, Surface Mount, Tape & Reel

DRAWING No. B024-1
 TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

SERIES: B 0 2 4 - 3 2 2 X - X 0 X - Z

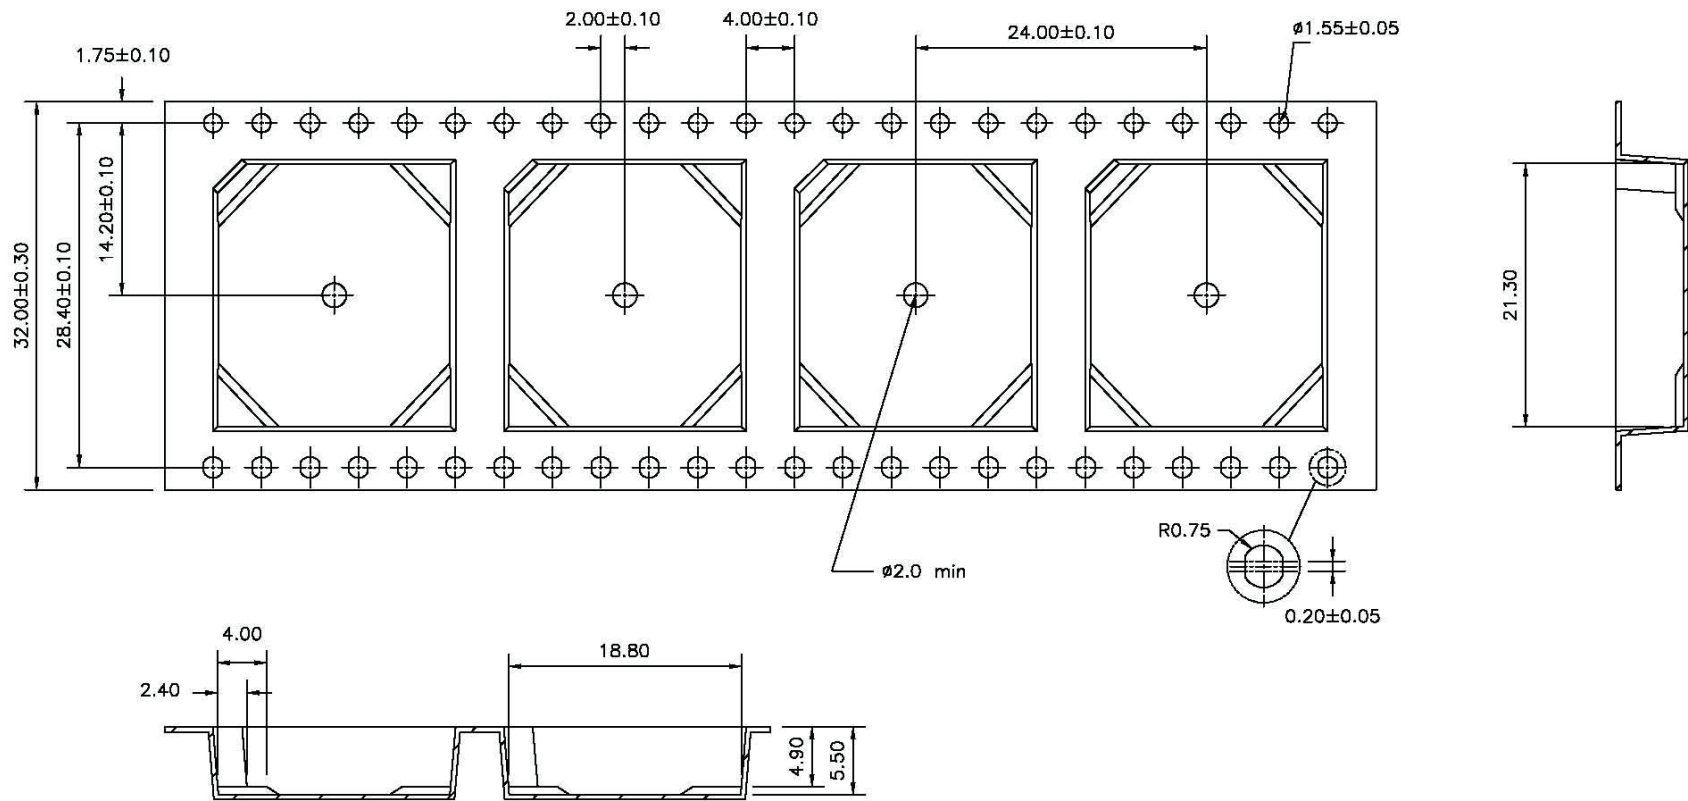

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	02/26/08	
SCALE: N/A					PLCC Socket, Surface Mount, Tape & Reel
DRAWING No. B024-1					SERIES: B 0 2 4 - 3 2 2 X - X 0 X- Z
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-					Pg: 2
ANGLE +/-					UNIT: mm