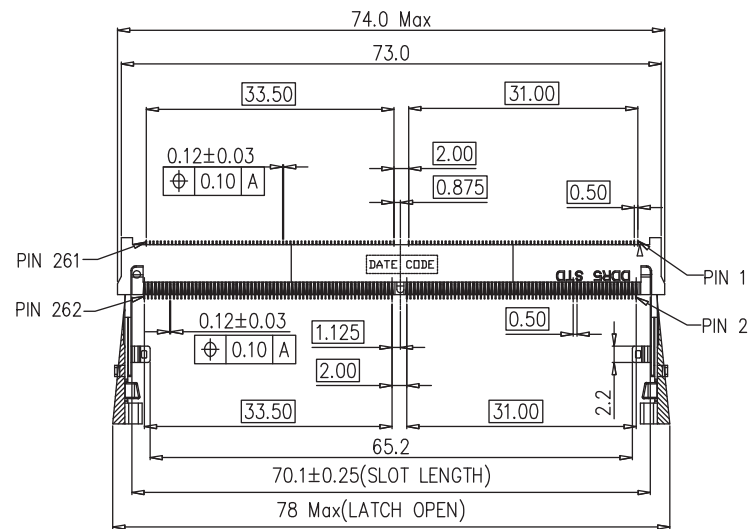


Section A - A

MATERIAL:

CONTACT PLATING: Specified Au Thickness in Contact Area,
Au Flash on Solder Tail Over 50u" Nickel Subplate
HOUSING: High Temp Thermo Plastic; LCP; Black; UL 94-V-0
CONTACT: Phosphor Bronze
METAL LATCH: Stainless Steel SUS301

ENVIROMENTAL:

OPERATING TEMPERATURE:- 40°C +85°C
STORAGE TEMPERATURE: - 40°C +85°C




ELECTRICAL:

CURRENT RATING :0.5A per Pin
VOLATAGE RATING; 25 V AC/DC
CONTACT RESISTANCE:60 mohms
INSULATION RESISTANCE; 500M Ohms
DIELECTRIC WITHSTANDING VOLTAGE:125 VAC

HOW TO ORDER:


B	0	3	0	-	2	6	2	7	-	6	0	X	X	-	Z	H	F
												PLATING:		RoHS COMPLIANT		HALOGEN FREE	
NUMBER OF CONTACTS:												2 - FULL Au FLASH					
262												4 - 5µ" Au					
												5 - 10µ" Au					
												6 - 15µ" Au		PACKAGING:			
												8 - 30µ" Au		0 - Tray			
														1 - Tape & Reel (Normal)			
KEY TYPE / VOLTAGE OPTION :												HEIGHT:		ORIENTATION			
7 - 1.1 V												4.0mm		0 - Standard			

Rev	Description	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	01/16/20		
						DDR5 SO-DIMM Socket, Right Angle, (1.1 Volt) 262 Position,	
						Standard Orientation	
SCALE: N/A							
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	P/N: B030-2627-60XX-ZHF	
						Pg: 1 of 3	

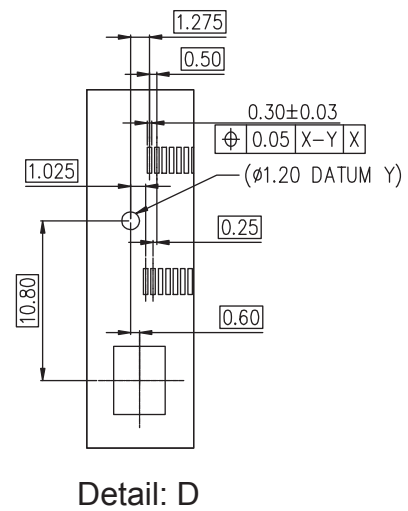
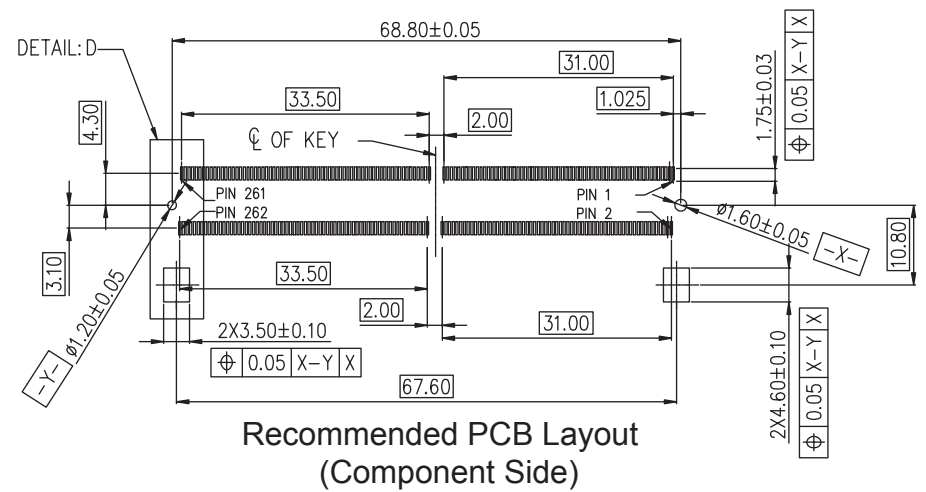


SMP TECHNOLOGY, INC.




DDR5 SO-DIMM Socket, Right Angle, (1.1 Volt) 262 Position, Standard Orientation
--

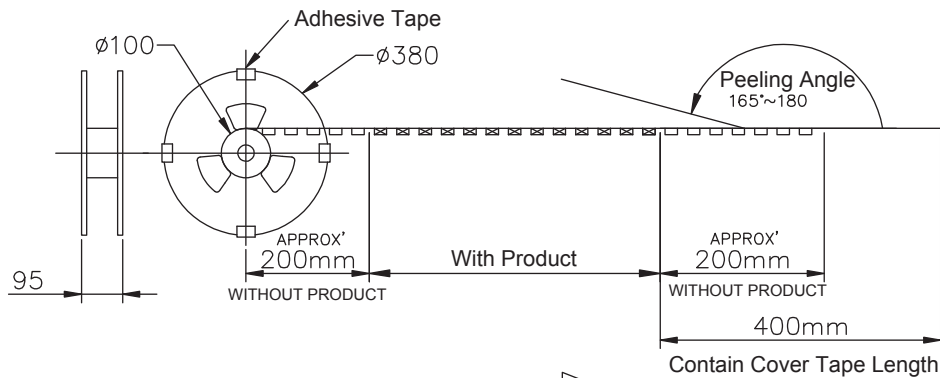

PULL OUT DIRECTION 

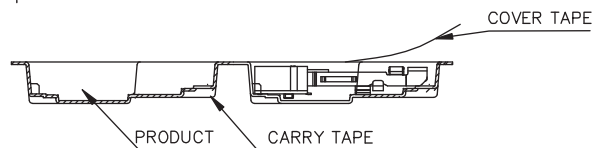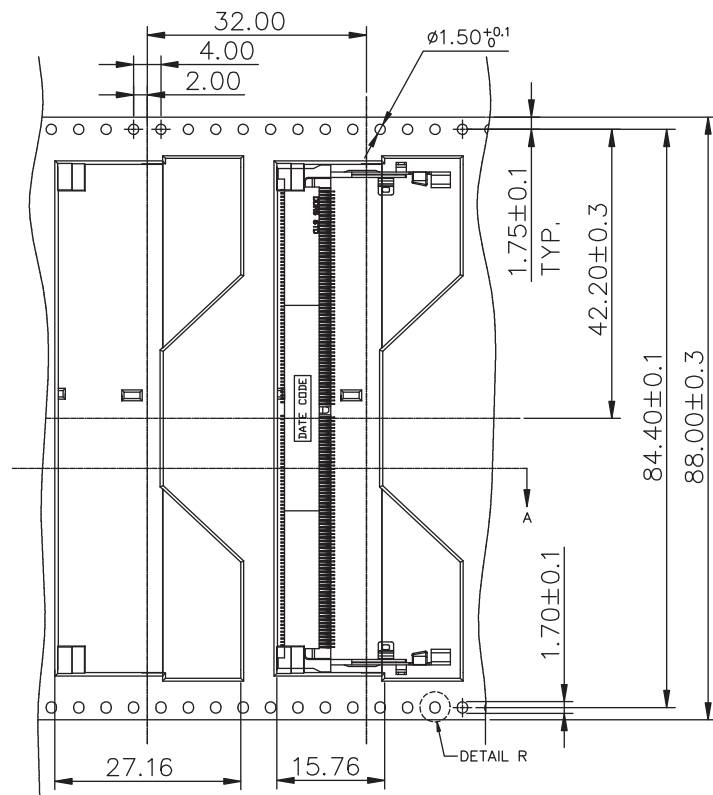

A - A

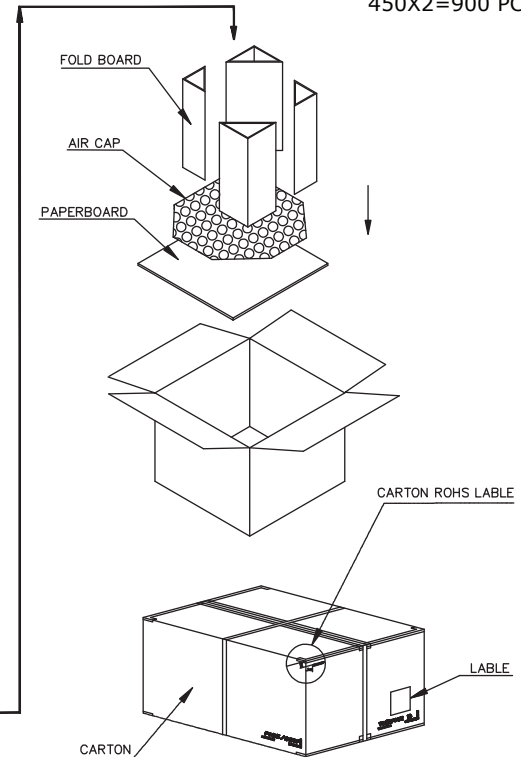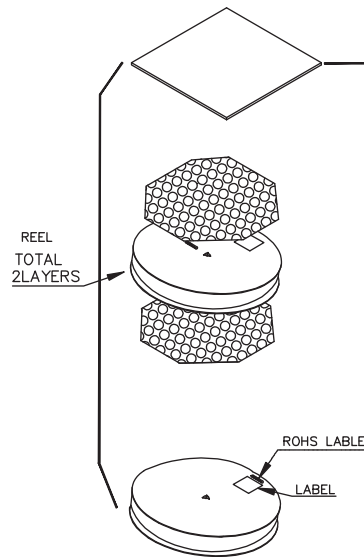

NOTE:

450 PCS / REEL

2 REELS / CARTON

450X2=900 PCS/ CARTON

SMP TECHNOLOGY, INC.

DDR5 SO-DIMM Socket, Right Angle, (1.1 Volt) 262 Position,
Standard Orientation