


DIMENSION(mm)

CONTACTS	A	B	C
10	20.25	18.02	10.16
14	25.40	23.20	15.24
16	27.90	25.70	17.78
20	33.00	30.80	22.86
24	38.10	35.80	27.94
26	40.60	38.40	30.48
30	45.72	43.42	35.56
34	50.85	48.70	40.64
40	58.50	56.15	48.26
50	71.10	68.85	60.96
60	84.00	81.75	73.66
64	89.30	86.85	78.74

HOW TO ORDER:

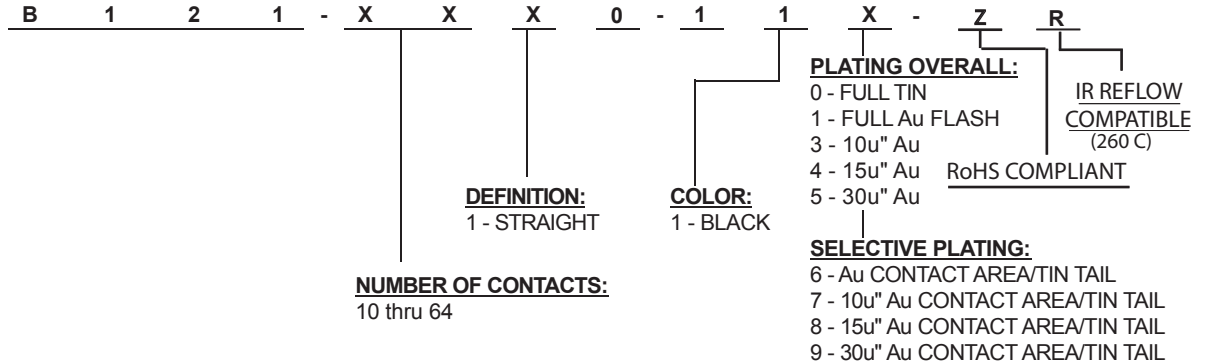

CURRENT: 1 AMP
 CONTACT RESISTANCE: 30 Milliohms Max.
 INSULATOR RESISTANCE: 1000 Megaohms Min.
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
 OPERATING TEMPERATURE: -55° C TO +105° C

MATERIAL

INSULATOR OPTIONS: PBT & 30% Glass Fiber UL94V-0 or
 NYLON 6T UL94V-0 (260 C Rated - 10 Sec) - Add R to Part Number
 CONTACT: Copper Alloy
 PLATING: Gold and/or Matte Tin over 50 Microinches Nickel

Rev		Apv.	Date
0	Issued	S.E.	2/1/96
A	Revised For RoHS Compliance	A.M.	7/15/06

SMP TECHNOLOGY, INC.

SCALE	MAT'L	FINISH	UNIT: mm
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-
		ANGLE +/-	

Box Header, 2.54mm Pitch, Vertical, Reflow Compatible
 SERIES: B 12 1 - X X 10 - 11 X - Z R
 Pg: 1