




Recommended P.C.B Layout(Top Side)

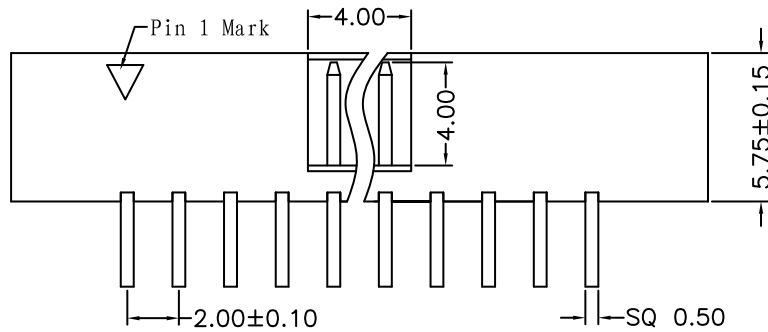

HOW TO ORDER:

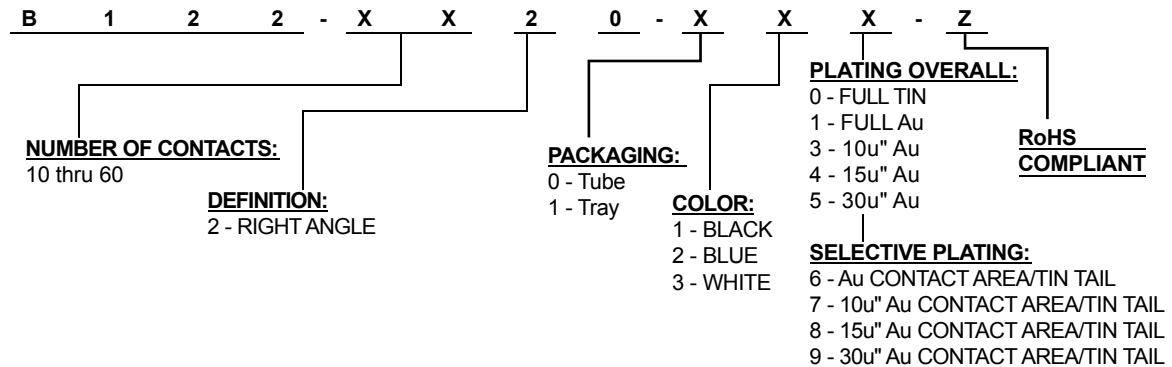

ELECTRICAL:

CURRENT: 1A
CONTACT RESISTANCE: 20mW Max.
INSULATOR RESISTANCE: 1000MW Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL:

INSULATOR: PA 6T + 30% GLASS FIBER (UL94V-0)
CONTACT: COPPER ALLOY

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	07/22/03
A	WHS	S.M.	S.M.	08/07/06
B	B.S.	S.M.	S.M.	04/04/12

SMP TECHNOLOGY, INC.

Box Header, 2.00mm Pitch, Right Angle, Thru Hole

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- 5° UNIT: mm

SERIES: B 1 2 2 - X X 2 0 - 0 X X - Z