

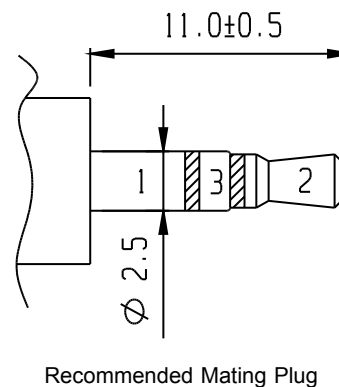
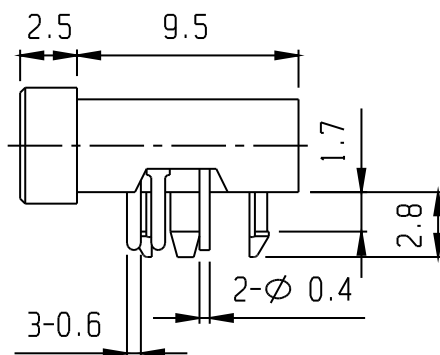
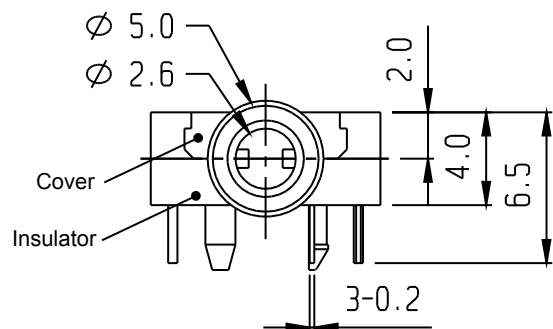
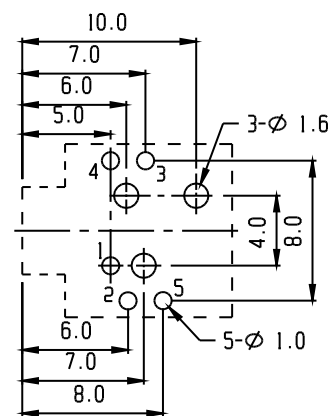


Isometric View

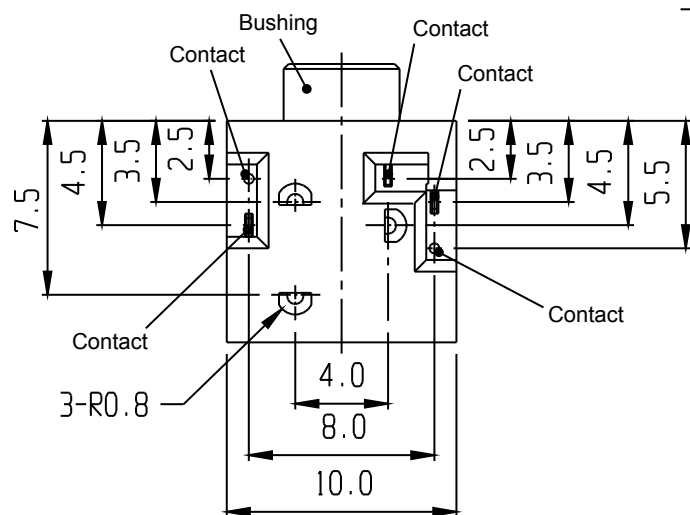

Recommended PCB Layout



ELECTRICAL:

VOLTAGE / CURRENT RATING: 30 VDC / 0.3A

CONTACT RESISTANCE: 50mΩ Max.

INSULATOR RESISTANCE: 100MΩ @ 500 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR: THERMOPLASTIC, NY66 - BLACK

COVER: THERMOPLASTIC, NY66 - BLACK

CONTACTS: BRASS, SILVER PLATED

BUSHING: COPPER ALLOY, NICKEL PLATED

HOW TO ORDER:

S 7 0 0 - 0 3 1 0 - 1 2 0 - Z

TYPE NUMBER 03

SCHEMATIC NUMBER: SEE SCHEMATIC NUMBER ABOVE

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0 Issued	B.S.	S.M.	S.M.	05/015/10	
SCALE					Stereo Ear Phone Jack: 2.5mm, Type 3,
					Right Angle, Thru Hole, 10mm width x 4mm Height
TOL. DEC.	.X +/- 0.5	.XX +/- 0.3	.XXX +/- 0.15	ANGLE +/-	UNIT: mm
SERIES: S 7 0 0 - 0 3 1 0 - 1 2 0 - Z					Pg: 1