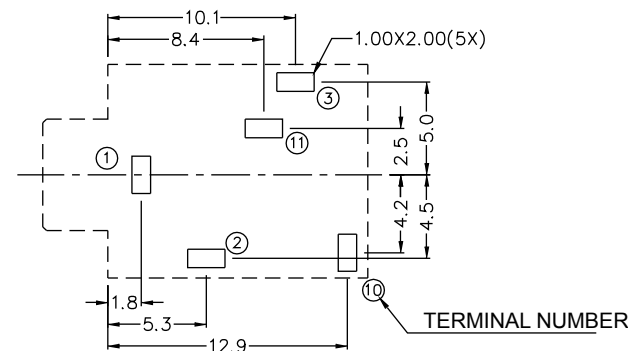
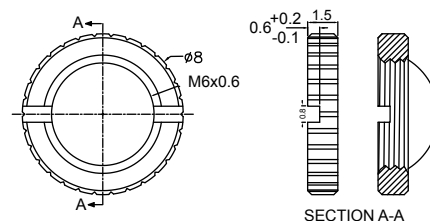
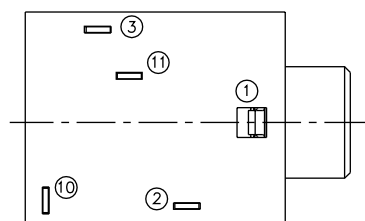



RECOMMENDED 3.5 mm Ø MATING PLUG

ELECTRICAL:

CURRENT: 0.5A

CONTACT RESISTANCE: < 50m

INSULATOR RESISTANCE: > 100M

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

COVER: POLYCARBONATE - TRANSPARENT

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

SCHEMATIC					
Threaded M6 x .05	S800-0510-2100-Z	S800-0520-2100-Z	S800-0530-2100-Z	S800-0540-2100-Z	S800-0550-2100-Z

HOW TO ORDER:

S 8 0 0 - 0 5 X 0 - 2 1 0 0 - Z
 TYPE NUMBER 05 SCHEMATIC OPTION: PACKAGING OPTION:
 RoHS COMPLIANT

SCHEMATIC OPTION:

See SchematicTable

PACKAGING OPTION:

0 - Tray

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Audio Jack, 3.5 mm; Right Angle ;11.5 mm Width, 6.0mm Height, 14 mm Length;Thru Hole ; Threaded Bushings;Transparent Cover P/N : S800-05X0-2100-ZPg: 1	
0	Issued	S.E.	S.M.	S.M.	6/9/98		
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08		
SCALE:N/A							
TOL.	DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	