
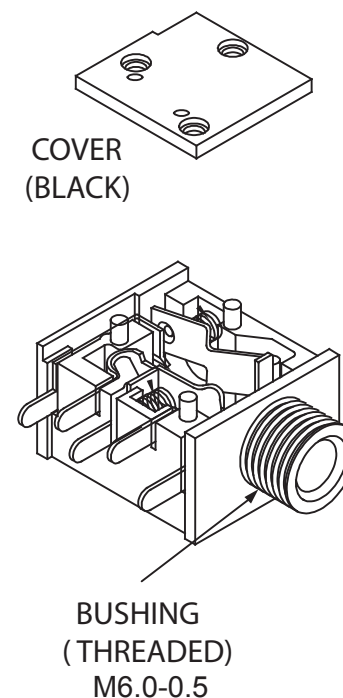
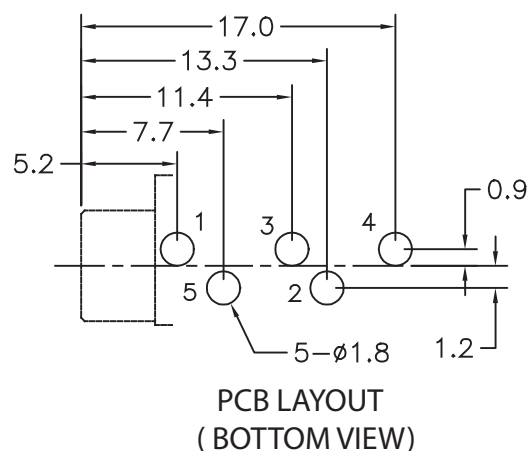


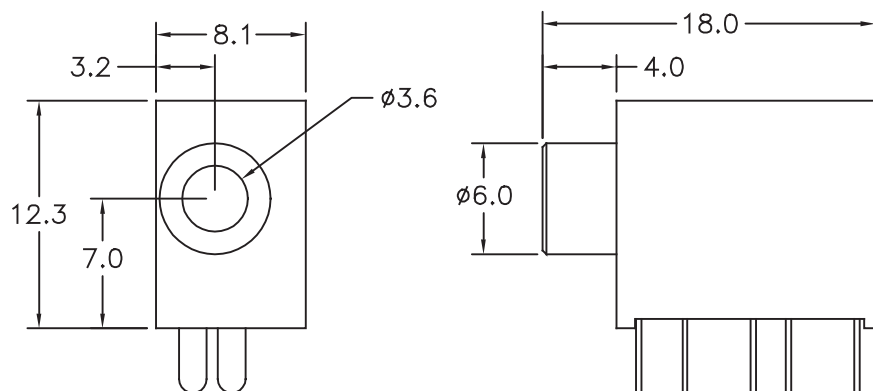

SCHEMATIC						
Threaded Transparent Cover	S800-0911-110-Z	S800-0921-110-Z	S800-0931-110-Z	S800-0941-110-Z	S800-0951-110-Z	S800-0961-110-Z

ELECTRICAL:

CURRENT: 0.5A

CONTACT RESISTANCE: < 50m

INSULATOR RESISTANCE: > 100M

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

INSULATOR HIGH TEMPERATURE: NYLON 66 + 30% FG, UL94V-0

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

HOW TO ORDER:

S 8 0 0 - 0 9 X 1 - 1 1 0 - Z

TYPE NUMBER SCHEMATIC NUMBER: RoHS COMPLIANT

09 SEE SCHEMATIC
NUMBER ABOVE

Rev		Drawn	Checked	Apprvd	Date	SMP TECHNOLOGY, INC.	
0	Issued		S.E.	S.E.	06/09/98		
A	Updated Drawing	A.M.	A.M.	D.H.	03/19/04	Stereo Jack 3.5mm, 12.3mm High, 8.1mm Wide, All Metal Bushing w/ M6.0-0.5 Threads; Black Cover	
B	Revised For RoHS Compliance	A.M.	A.M.	S.M.	07/25/05		
SCALE: N/A							
TOL. DEC.	X.X +/- 0.5	X.XX +/- 0.3	X.XXX +/- 0.15	ANGLE +/- 3°	UNIT: mm	SERIES: S800 - 09X1 - 110-Z	
						Pg: 1	