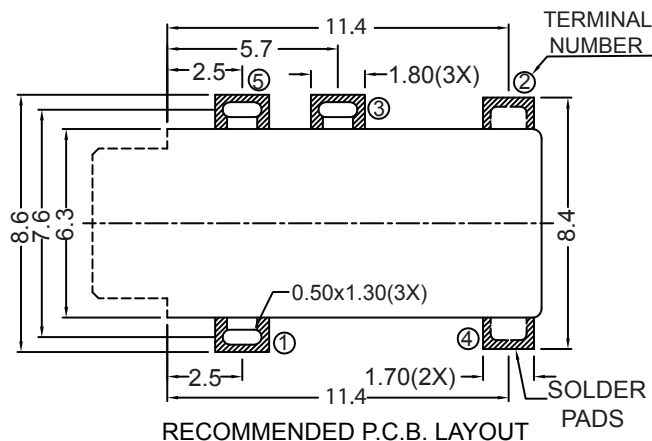
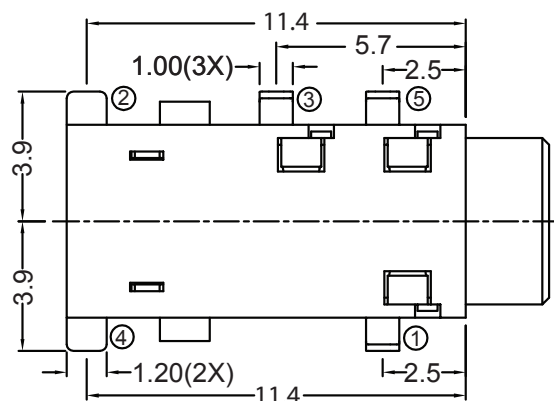
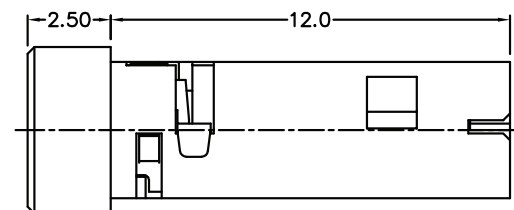
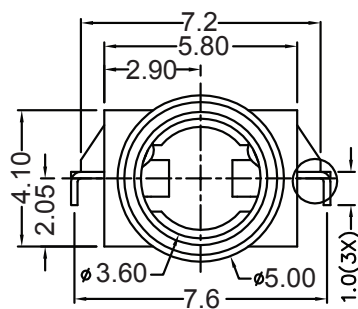
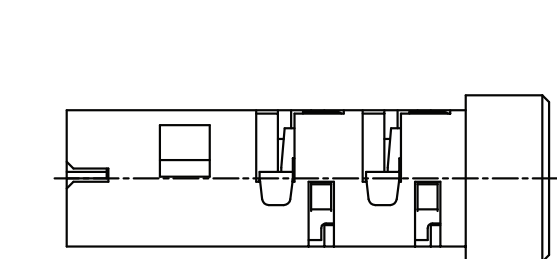


MECHANICAL:
DURABILITY :5000 Cycles

ELECTRICAL:
VOLTAGE /CURRENT: 12VDC / 1.0 A
CONTACT RESISTANCE: < 50 milliohms
INSULATOR RESISTANCE: 100 Megaohms @50VDC
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:
INSULATOR : PA6T UL94V-0
CONTACTS: Copper Alloy ; Tin Plated

S 8 0 0 - 2 6 1 0 - 0 0 0 1 - Z
TYPE NUMBER
26

RoHS
COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	05/25/15	
					Audio Jack 3.5mm, Right Angle ; 7.2 mm Width ; 14.5 mm Length
					4.1 mm Height; Mid Mount; Thru Hole
TOL. DEC.	.X +/- 0.2	.XX +/- 0.1	.XXX +/- 0.05	ANGLE +/-	UNIT: mm
SERIES: S800-2610-0001-Z					Pg: 1